




In addition to the advantages of using our Aluminum Concrete Buckets, our **Laydown Aluminum Concrete Buckets**:

- Provide extra low loading height for easy, direct loading from concrete trucks.
- Uniquely engineer-designed. Is perfectly balanced and utilizes rolled tubular runners for smooth/automatic transition between horizontal-filling and vertical-hoisting/pouring positions.
- Precisely balanced to automatically go to position for vertical discharge.
- Easily handled when empty.

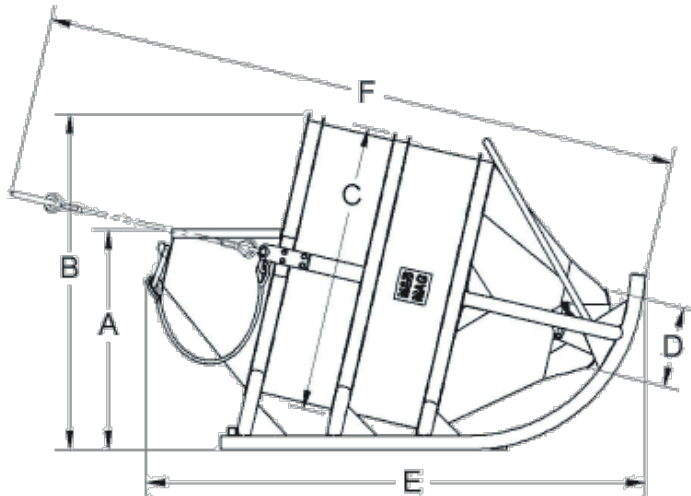

### Standard Laydown Aluminum Concrete Buckets

Model	Capacity			Loading Height	Overall Height	Outside Dia.	Gate Dia.	Total Length	Lifting Height	Weight	
	nominal	actual								pounds	kg
	yd <sup>3</sup>	m <sup>3</sup>	cu. ft.								
	"A"	"B"	"C"	"D"	"E"	"F"					
EDB-30	3	2.4	89	53"	80"	72"	20"	109"	144"	670	305
EDB-40	4	3.1	111	55"	84"	72"	20"	125"	160"	770	350

Each bucket is complete with wire rope sling. Bucket weight includes wire rope sling.

We reserve the right to make specification, equipment and price changes without notice.

### Accessories for Laydown Aluminum Buckets (optional):

Rubber Sub Hopper HR-3212 and Rubber Gate Seal GSR-250